

Peak Power Pack

www.victronenergy.com

A lithium-ion battery pack with intrinsically safe LiFePO4 cells, a built-in charger, and suitable for high discharge currents.

Nominal voltage: 12.8V

Battery capacity: 20Ah to 40Ah (not suitable for parallel or series connection)

Lightweight and easy to install

- Ideal for mobile applications.

Effective protection against improper use

- Ideal for solar power and other applications where excessive discharge might quickly cause damage to lead acid batteries.

Output 1 "mover": high-capacity output for caravan manoeuvring and other applications that are energy-intensive

- Ideal for caravan manoeuvring (caravan movers).
- Short-circuit proof.
- Protected against excessive battery discharge.

Output 2 "domestic": for low DC loads

- Intended for lighting, audio and video, pumps, fridges.
- Short-circuit proof.
- Protected against excessive battery discharge.

Input 1 "car/solar": charging while driving or charging with a solar panel.

- Equipped with voltage and current control for safe charging of the lithium-ion battery. In fact, any source of electric power can be connected to this input (e.g. an alternator or a battery charger), as long as $11V < V_{in} < 25V$. The current limit is automatically set to a safe value.

Input 2 "adapter": the adapter supplied with the Peak Power Pack can be connected to this input

- Battery charging current: 3A, and suitable for 110/230V power supply.

Rapid charging is possible via output 1 (high capacity output and 30Ah/40Ah models only)

- A battery charger or inverter/charger can be connected to the high capacity output. The maximum charging current is 15A and 20A respectively and the recommended charging voltage is 14V (maximum 14.2V).

Storage mode

- Reduces power consumption to almost zero. Prevents damage due to excessive discharge of the battery during storage.

Remote control with status indicator

- Push button (supplied) with a dual-colour LED status indicator:
 - o Short push of the button: high capacity output activated for 30 minutes (mover applications), red LED.
 - o Hold down for 2 seconds: high capacity output always activated, slow flashing red LED.
 - o Hold down for 5 seconds: storage mode, blue LED flashes 10 times.
 - o Battery is charged via input 1: slow flashing blue LED.
 - o Battery fully charged: blue LED.
 - o Overload or overheating: flashing red LED.

VE.Direct port: can be connected to a PC or smartphone

('VE.Direct to USB' or 'VE.Direct Bluetooth Smart dongle' required)

- Operation:
 - o Output 1: on / 30-minute timer / off
 - o Output 2: on/off
 - o Input 1: on/off
- Monitoring:
 - o Battery voltage
 - o Temperature and alarms



12.8 V, 20Ah




12.8 V, 30Ah



12.8 V, 40Ah



High capacity output (mover) and low capacity output (domestic)

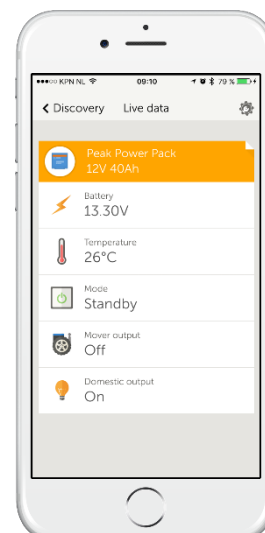

Peak Power Pack	PPP-20	PPP-30	PPP-40
Capacity	20Ah	30Ah	40Ah
Stored energy	256Wh	384Wh	512Wh
Battery type	Lithium-ion (LiFePO4)		
Nominal voltage	12.8V		
Self-discharge when activated	< 13 Ah /year (< 1.4 mA)		
Self-discharge in storage mode	< 6.5 Ah /year (< 0.7 mA)		
Output 1: high capacity "mover"			
Continuous output current	150A		
Maximum output current (10 seconds)	200A		
Short-circuit current	300A		
Safety features	Overload / short-circuiting / temperature / excessive discharge		
Maximum charging current	n.a.	15A (no protection)	20A (no protection)
Recommended charging voltage	14V (no protection)		
Maximum charging voltage	14.2V (no protection)		
Maximum cable diameter	16mm ² (screw clamps)		
Output 2: on-board power network "domestic"			
Continuous output current	30A		
Maximum output current (10 seconds)	50A		
Short-circuit current	80A		
Safety features	Overload / short-circuiting / temperature / excessive discharge		
Maximum charging current	n.a.	10A (no protection)	10A (no protection)
Recommended charging voltage	14V (no protection)		
Maximum charging voltage	14.2V (no protection)		
Maximum cable diameter	6mm ² (screw clamps)		
Input 1: "car/solar"			
Input voltage range	11 V < Vin < 25 V		
Current limitation	7A		
Input 2: "adapter"			
Output voltage	15V		
Output current	3A		
Input voltage	110 / 230 V 50 / 60 Hz		
General			
Operation	Multifunctional push-button with dual-colour LED		
VE.Direct port	Communication with a smartphone (VE.Direct Bluetooth Smart-dongle required) Connection to a PC (VE.Direct to USB cable required)		
Operating temperature	Battery charging: 0°C to 40°C Battery discharge: -20°C to +40°C Storage: -20°C to +40°C (charging and discharging not possible outside the given temperature range)		
Humidity (no condensation)	Max. 95%		
Weight	3.8kg	5.4kg	8,6kg
Dimensions (h x w x d)	132 x 190 x 172 mm	172 x 190 x 172 mm	212 x 190 x 172 mm
Standards			
Safety	NEN-EN-IEC 60335-1, NEN-EN-IEC 60335-2-29, NEN-EN-IEC 62109-1		
Emission / Immunity	NEN-EN 55014-1, NEN-EN 55014-2, NEN-IEC 61000-3-2, NEN-IEC 61000-3-3, NEN-EN 50498		



Adapter and car/solar inputs
(plug for the car/solar input is included)



VE.Direct and push-button



Fixing strap
Adapter
Power cable
Push-button with cable (2m) and dual-colour LED